


TVSYS -2: True View™ High Performance Color Wireless Video System

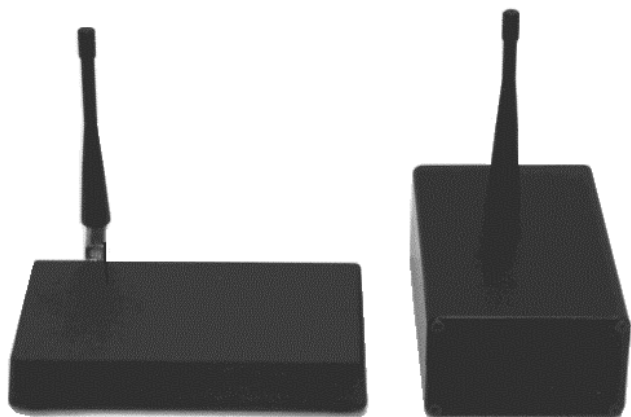

CCD Sensor: 1/4" CCD sensor with Digital Signal Processing and 3-lux sensitivity
DC Supply for Camera: 7.2 - 15 VDC @ 250 mA
DC Supply for Receiver: 10-15 VDC @ 300 mA
Receiver Frequency Range: 902 - 928 MHz.
Video Bandwidth: > 5 MHz.
FCC Part 15 certified
Video Output: 1.0 Vpp @ 75 Ohms RCA jack
Transmission Range: 300 - 600 ft. w/ 50,000 mV/m @ 3 meters

Wireless video transmission systems have become a convenient and cost effective means to connect video cameras to monitor systems which otherwise would be impossible. Wired systems require permanent installations and large amounts of time to execute. Wireless solutions can be installed in just minutes, and are adaptable as the needs change. In the last few years, the FCC has made several new, unlicensed frequency bands available for wireless applications. Pragmatic has chosen the 900 MHz band for its new products that include wireless video, audio and data transmission systems.

Many applications for video security systems quickly become very complicated because of wiring problems. For example, a wired video security system located in different buildings or across a road would be nearly impossible to implement. Wiring for only a temporary installation is also expensive and inconvenient, but a wireless system is a cost effective and efficient solution to these dilemmas.

Some applications for wireless video security systems include covert monitoring, multiple observation locations from one video source or extending the coverage of an existing wired system. In addition, there are numerous portable applications for wireless video systems. For example, police officers could use a wireless system to document an arrest or provide backup surveillance on location. There is even the option for multiple receivers so all officers involved in a group operation could be kept informed with the latest information. Wireless video systems can also be implemented in residential applications. For years, security gates have had voice capability for access control but lacked proper video because of the distances involved or the multiple control points, but now wireless systems provide a solution.

The application possibilities are endless, from a remotely controlled aircraft or helicopter sending graphical information wirelessly to a command center or personnel on the ground, to a fire truck with a small video camera at the end of its ladder sending critical visual information to multiple locations on the ground in

Copyright © 1994- 2014. All rights reserved.

Pragmatic Communications Systems, Inc.

2340A Walsh Avenue, Santa Clara, CA 95051, USA

Tel. (408) 748 1100

Fax. (408) 663 9783

www.pragmatic1.com

order to monitor the progress of a fire from a bird's eye view. These and many other applications can find wireless video transmission vital, economical and easily deployable by using the True View™ wireless video systems from Pragmatic.

The wireless video products from Pragmatic use 900 MHz unlicensed ISM bands. The frequency in-use spans a range from 902 MHz to 928 MHz. Normally it is impossible to transmit radio signals through steel reinforced concrete or structures with metal coverings, yet often the 900 MHz signals in Pragmatic's wireless products find small gaps in the metal structures to penetrate. There is the possibility of degradation or partial loss of signal, but much of this problem is overcome by slightly moving the receiver antenna. Raising the antennas at the transmitter sight, receiver sight or both, may increase the received range. An optional Yagi antenna connected to the receiver can extend the range of operation up to 4 times the norm and help eliminate interference from the received signal. The receiver antenna must be pointed in the general direction of the transmitter to achieve the best maximum range. Typical operational range for low power unlicensed systems such as the TVSYS-1, TVSYS-2 and TVSYS-5 is from 300 to 1200 feet line of sight. The range depends on building structure, metal surfaces, antenna height, receiver antenna, and interference from other radio transmitters using these same frequency bands. Remarkably, cellular phones operating close to the 900 MHz band have been shown to have no effect on Pragmatic systems.

As mentioned previously, a high gain Yagi antenna placed at the receiver will reduce the effects of other signal interference and increase the operational range. The alignment of the Yagi elements may be rotated 90 degrees to match horizontal or vertical transmissions. DC power is supplied to the transmitter and receiver modules. 120 V AC to 9 V DC power packs are recommended, however, both units will operate from 10-16 V DC unregulated power supplies. The low power transmitters in TVSYS-1, TVSYS-2 and TVSYS-5 have an internal antenna and will operate from 7.2 V DC (6 Ni-Cd battery cells). The receiver is supplied with a 1/2 wave dipole or a 1/4 wave antenna and uses 300 mA of current. Batteries can be used as a power source and the coaxial power connector is 2.5 mm type center conductor positive. Video signals are connected via standard RCA connectors with video levels of 1.0 Vpp at 75 Ohms. Low power transmitter and receiver units are not waterproof so exterior use requires a sealed container to provide protection from moisture. The transmitter can only be housed in a plastic so that the internal antenna can radiate a signal, while the receiver antenna can be connected via any coaxial cable or waterproof chassis connection.

It should be remembered that losses in the coaxial cable would reduce the signal reaching the receiver and hence a low noise amplifier (LNA) may be connected optionally at the antenna to improve the system performance. The receiver RCV915 is designed to provide DC power to a LNA at the antenna.

For other applications requiring transmission ranges from 5 to 20 miles, 1-Watt or 4-Watts transmitter is available. It operates with an external antenna and must be licensed with the FCC for private use or use by a government agency. If a 1-Watt or 4-Watt transmitter is being used, the antenna must be connected first before applying power to the module, otherwise the transmitter modules may be destroyed without connecting the antenna as a load. The range of the 1-Watt unit has been tested up to 5 miles line of sight, while the 4-Watt system has been tested to a range up to 20 miles line of sight, with additional options of a Yagi antenna for additional distance. The power requirements for the 1-Watt transmitter are 7.2 V DC to 15 V DC at 500 mA with internal power supply regulation provided. The 4-Watts transmitters operate from stable power sources in the range of 12-14.5 V DC only. Power supply ripple should be less than 250 mVpp. AC-DC power packs are supplied for all systems but battery operation is also available provided power is maintained within prescribed limits. High power 1-4 Watt transmitters are only about 30% efficient and are housed in metal cases with heat sinks. They must be sealed in other equipment with air ventilation. 1-4 Watt transmitters operate warm to the touch but are not hot.

Copyright © 1994- 2014. All rights reserved.

Pragmatic Communications Systems, Inc.

2340A Walsh Avenue, Santa Clara, CA 95051, USA

Tel. (408) 748 1100

Fax. (408) 663 9783

www.pragmatic1.com

Coaxial cable type RG58 (50 Ohms) or better is recommended for connection between the antennas and either the transmitters or receivers. It is advised to keep cable length under 10 feet, if possible, in order to avoid signal loss at 900 MHz. It is advised to run power and video cables long distances rather than 900 MHz antenna cables.

Applications:

Baby monitor
Parking lot monitor
Playground monitors
Swimming pool monitor
Hotel / Motel surveillance
Small business surveillance
Home security - surveillance
Bank - Private Security monitoring
Construction site - Hazardous Waste Site monitor
Aerial video photography from RC helicopters / airplanes

Features and Benefits:

WCA-2 wireless color camera
RCV915 wireless receiver with ANT-1R Antenna
Two AC-DC wall power jacks
Transmission range:
~ 300 - 600 ft. w/ 50,000 mV/m @ 3 meters
1/4" CCD sensor with Digital Signal Processing and 3-lux sensitivity
DC supply for camera:
7.2 - 15 V DC @ 250 mA
DC supply for receiver:
10-15 V DC @ 300 mA
Video output: 1.0 Vpp @ 75 Ohms RCA jack
Receiver frequency range:
902 - 928 MHz

Light weight and compact in size
Video Bandwidth > 5 MHz.
Automatic Level Control
FCC Part 15 certified
Optional Features include:
CLA-12: cigarette lighter adapter for auto
BATT-1: rechargeable battery pack - 7.2 V DC
CLCD- 4" Color LCD Video Monitor
WATX: wireless audio transmitter (factory installed option)
WARX: wireless audio receiver (factory installed option)

Architect Specifications:

The unit shall consist of a wireless transmitter and a wireless receiver. It shall be capable of transmitting high performance colored video. It shall have a transmission range of 300-600 feet. I shall have a DC supply for camera of 7.2 – 15 V DC at 250 mA and a DC supply for receiver of 10-15 V DC at 300 mA. The video output shall be 1.0 Vpp at 75 Ohms RCA jack. The receiver frequency range shall be 902-928 MHz. It shall have multiple optional features and be FCC Part 15 certified. Its sensitivity shall be 1/4" CCD sensor with digital signal processing and 3-lux sensitivity. It shall be able to transmit through most building materials.

The unit shall be a Pragmatic TVSYS-2 high performance, colored wireless video system.

Copyright © 1994- 2014. All rights reserved.

Pragmatic Communications Systems, Inc.

2340A Walsh Avenue, Santa Clara, CA 95051, USA

Tel. (408) 748 1100

Fax. (408) 663 9783

www.pragmatic1.com